


Concentric Taping Machine

Encintadora concéntrica


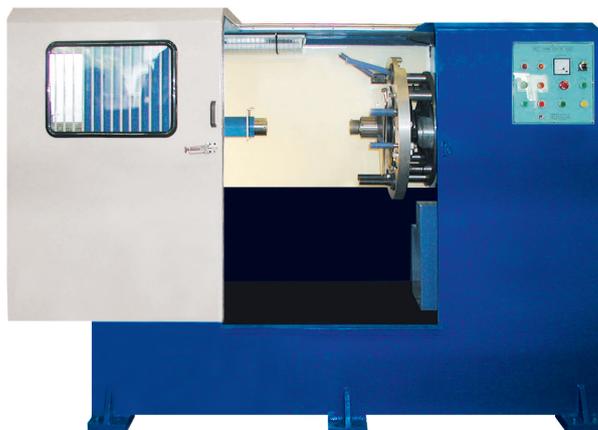


EN

- Concentric taping head machine.
- Suitable for copper and aluminum foils, textile, PE, paper as well as for other “non metal” tapes.
- Tape tension control is done through hysteresis brake.
- Taping head and pulling capstan are driven independently by AC servo motor.
- HMI+PLC control system for pre-setting taping pitch, tape tension compensation and speed synchronization.

ES

- Máquina encintadora concéntrica.
- Apta para cintas de cobre y aluminio, textil, PE, papel o cualquier otro tipo de cinta “no metálica”.
- Control de tensión de la cinta mediante freno de histéresis.
- Accionamiento independiente del cabestrante de tiro y de la encintadora mediante servo motor AC.
- Sistema de control HMI+PLC para la selección del paso, compensación de tensión y sincronizado de velocidad.

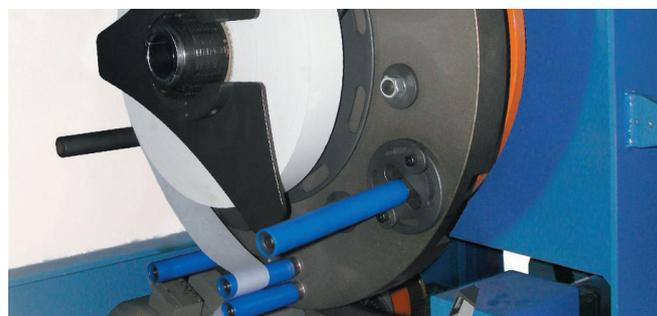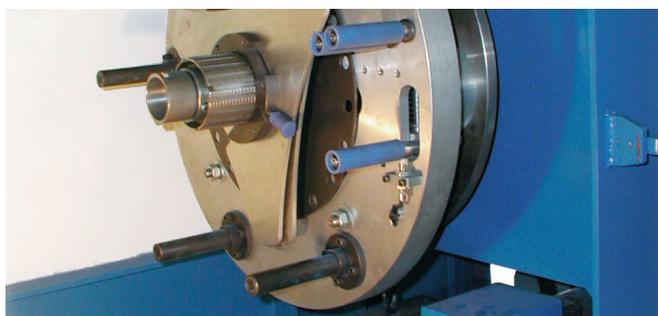

Model / Modelo

		NC-40	NC-40L	NC-50	NC-50L	NC-60
	D:	400	400	500	500	600
Pad size / Dimensión [mm]:	d:	76	105	76	105	105
	W:	30	50	40	70	70
Pad load / Capacidad [kg]		30	50	50	80	80
Cable Ø / Ø Cable [mm]		25	50	30	50	55
Taping speed / Velocidad de encintado [rpm]	Metal:	1300	1200	1000	1000	700
	Non metal:	1500	1400	1200	1200	840
Pad storage lenght / Almacenamiento [mm]		600	600	600	600	600
Motor power / Potencia motor [kW]		3.7 AC	3.7 AC	5.5 AC	5.5 AC	7.5 AC